

10/019634

1616

WO 01/00105

PCT/IB00/60082

RECEIVED

OCT 03 2002

TECH CENTER 1600/2900

-1/5-

APPROVED	O.G. FIG.
BY	CLASS
DRAFTSMAN	SUBCLASS

FIG. 1

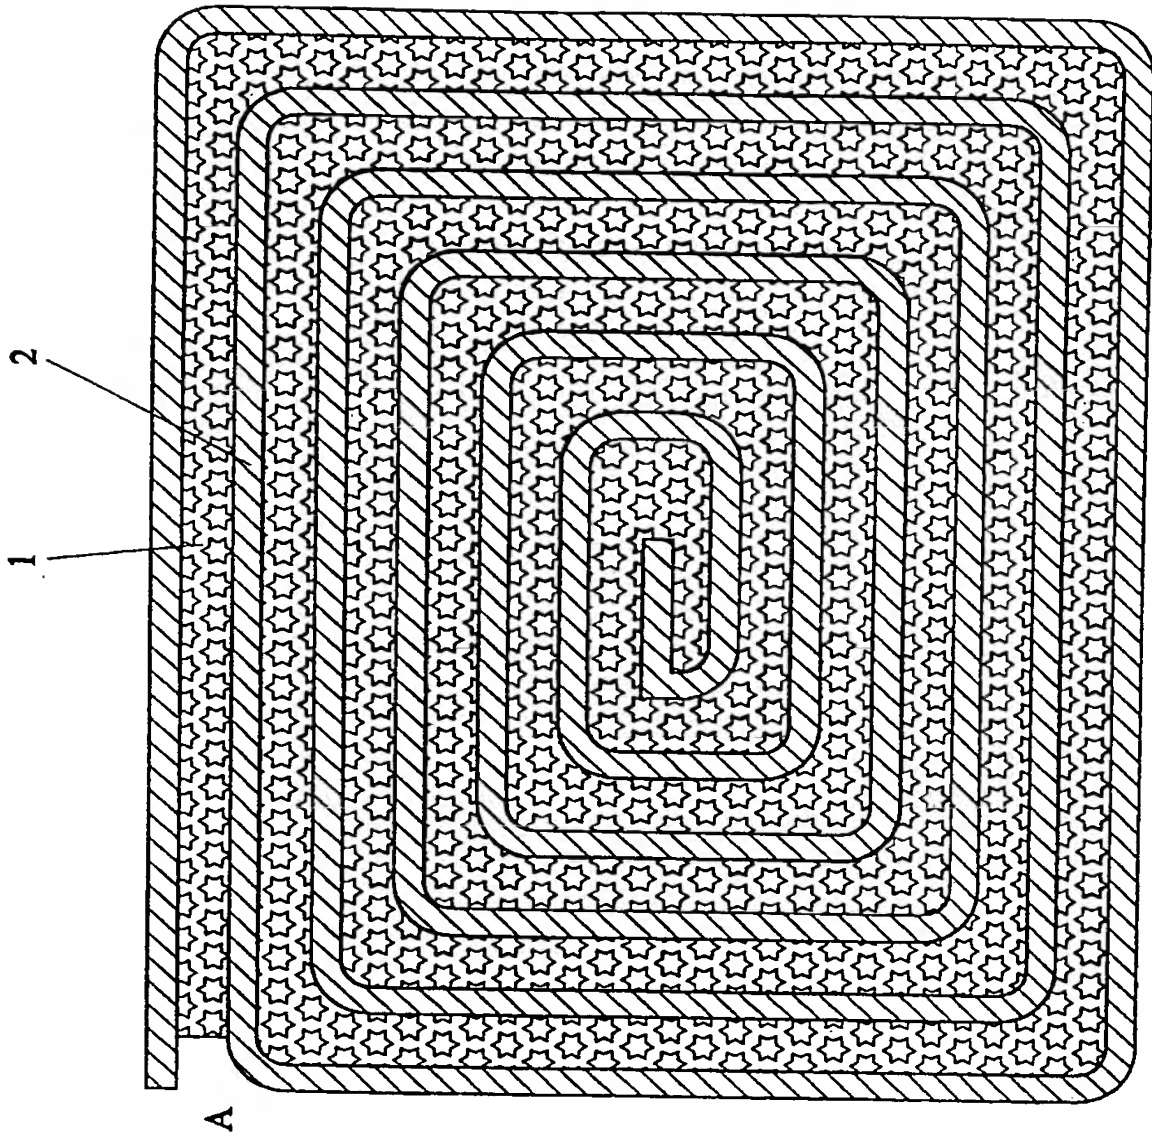


FIG. 1

-2/5-

APPROVED BY DRAFTSMAN	O.G. FIG.	
	CLASS	SUBCLASS

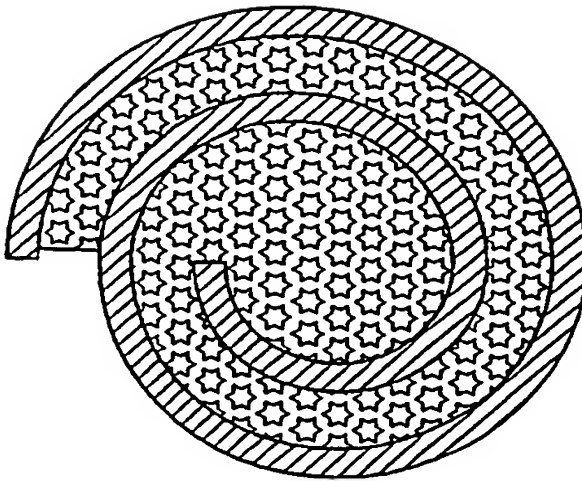


FIG. 2(a)

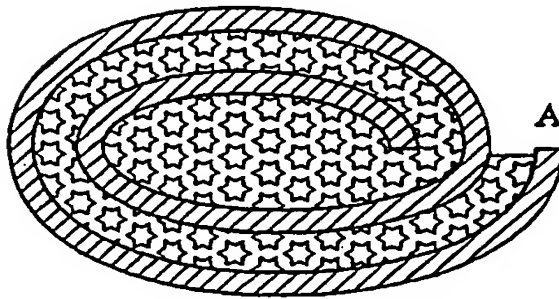


FIG. 2(b)

FIG. 2(c)


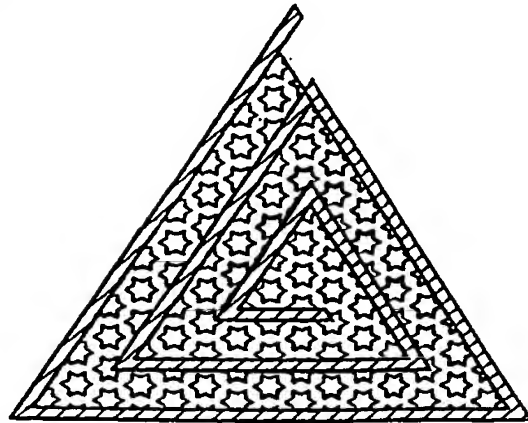


FIG. 2(d)

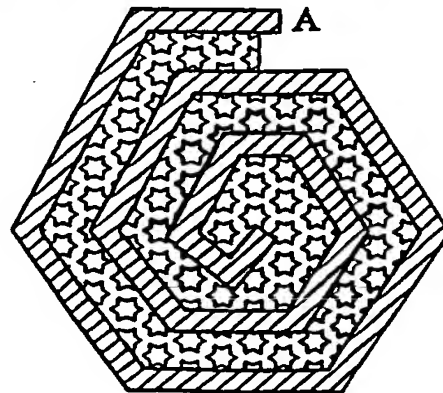

Footnote

-3/5-

APPROVED BY DRAFTSMAN	O.G. FIG.	SUBCLASS
	CLASS	

T E X T " H E A D I N G "

Variation of Burn Rate as a Function of Thickness at a width of 5mm and Density of 570 kgm^{-3}

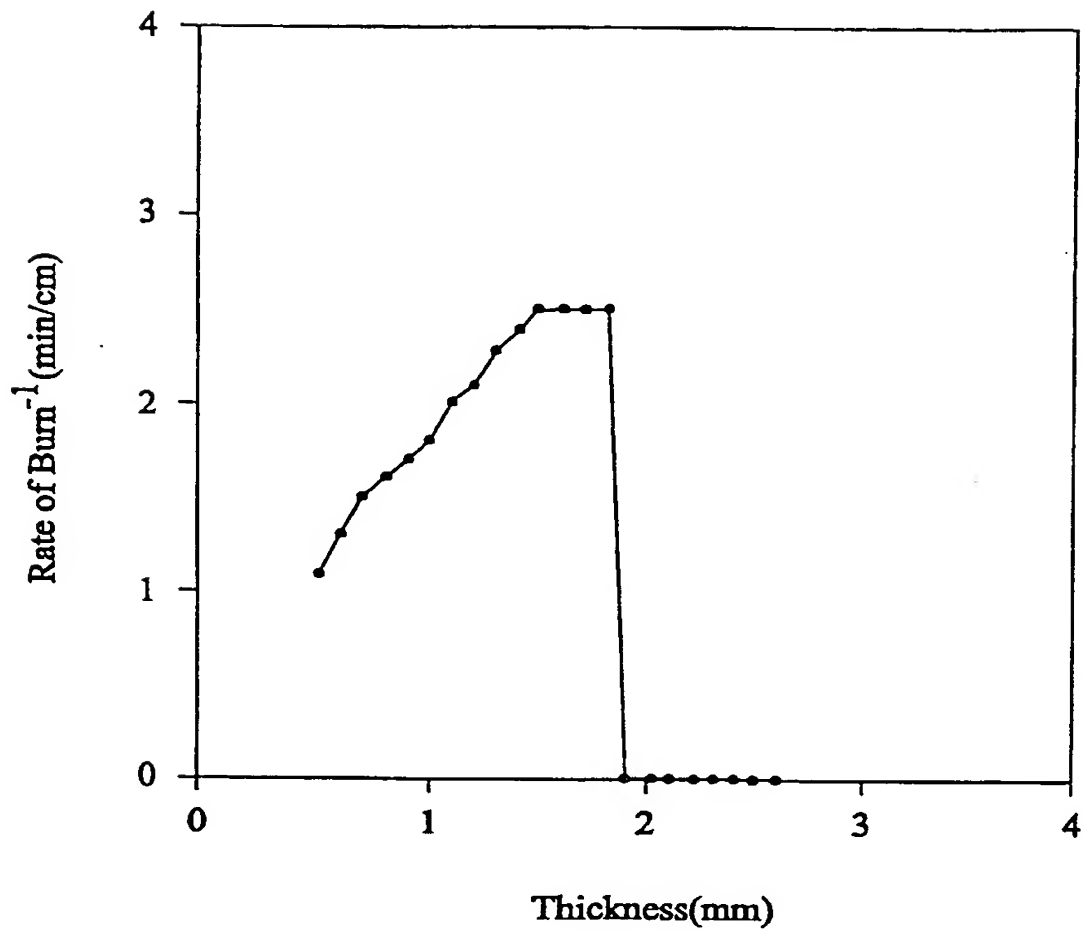


FIG. 3

-4/5-

APPROVED BY DRAFTSMAN	O.G. FIG.	
	CLASS	SUBCLASS

Variation of Burn Rate as a Function of Width at a
Thickness of 1.5mm and Density of 0.57

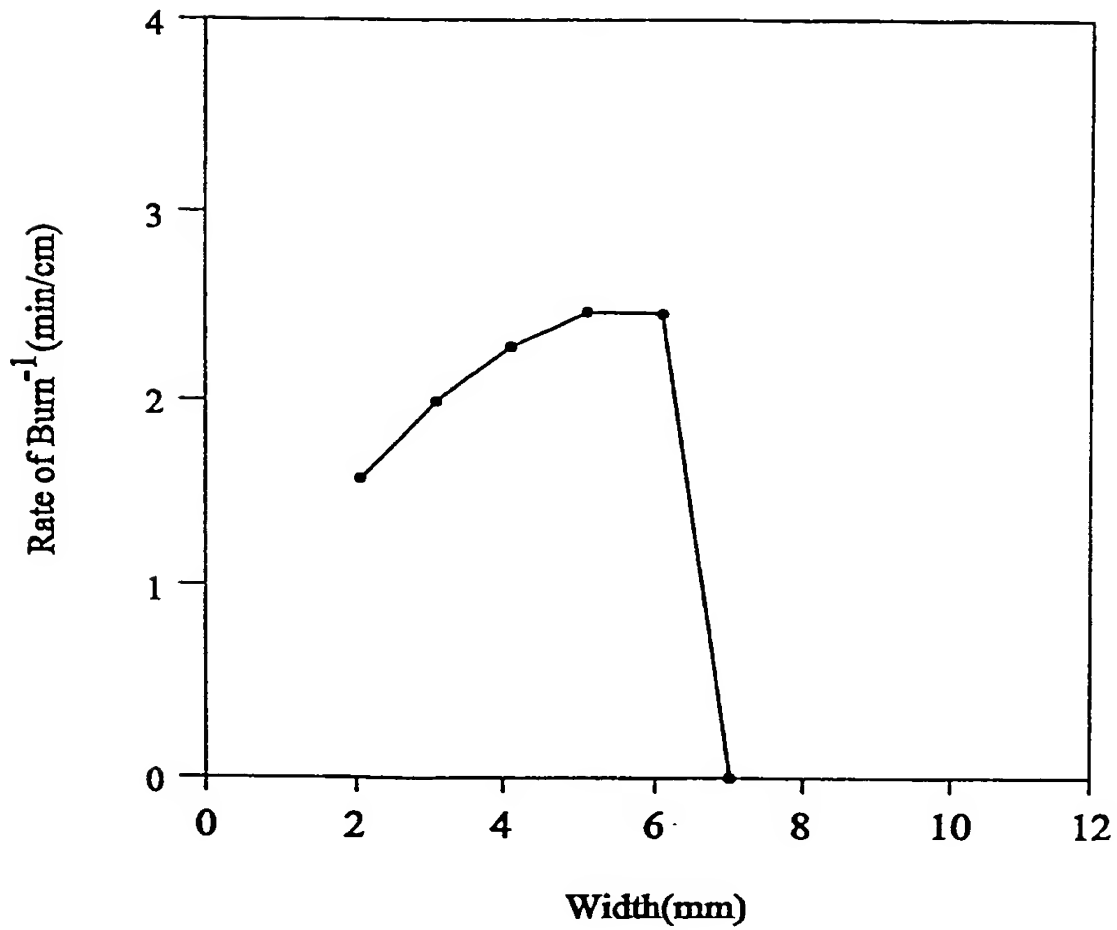


FIG. 4

-5/5-

APPROVED BY DRAFTSMAN	O.G. FIG.	
	CLASS	SUBCLASS

Variation of Burn Rate as a Function of Density at a
Width of 5mm and a Thickness of 1.5mm

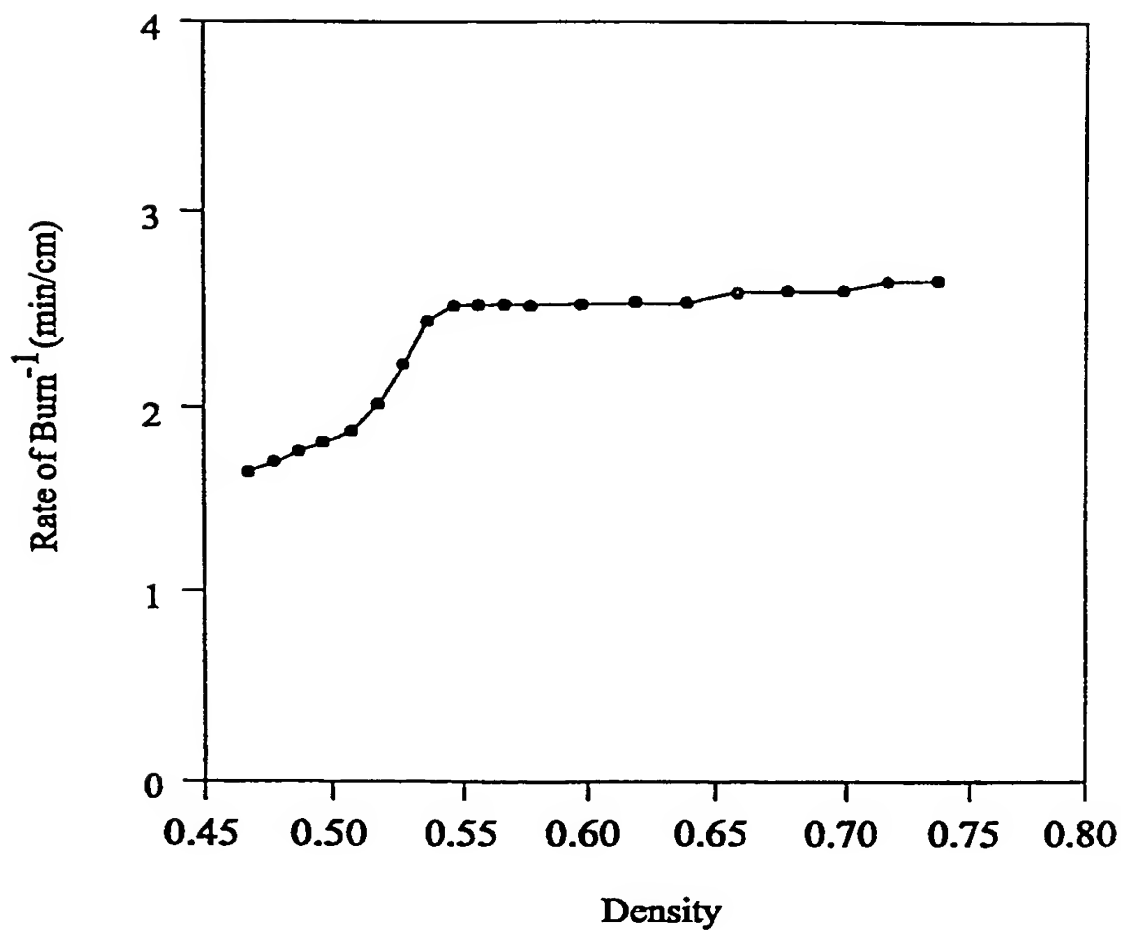


FIG. 5